

Thank you for selecting this new light fitting. All products are thoughtfully designed and manufactured. To get the most from your light please read these instructions fully. Some experience of electrical wiring and do-it-yourself is useful to install the product; however, we do recommend that you use a qualified electrician to fit the light.

**For your safety, this product must be installed in accordance with local Building Regulations. If in any doubt, or where required by the law, consult a competent person who is registered with an electrical self-certification scheme. Further information is available online or from your Local Authority.**

### **Contents**

1 x Light fitting including fixing bracket with side screws and lock washers.

1 x Fixing pack containing 2 fixing screws, 2 plugs, Instruction leaflet.

6 x Glass shades.

1 x Allen key.

### **Safety First/Important!**

This light fitting is suitable for indoor use only. It should not be fitted to newly painted or plastered surfaces as this may cause discolouration of the finish. Please read the following carefully.

#### **Important!**

This light fitting must be connected to the earth supply. If your lighting circuit does not have an earth, ask a qualified electrician to provide an earth facility:

- ★ This product is suitable for use with a dimmer switch.
- ★ To prevent electrocution, switch off at the mains supply before installing or maintaining this fitting. Ensure other persons cannot restore the electricity supply without your knowledge.
- ★ To avoid damage to concealed wiring during installation, establish the direction of the supply cable before drilling fixing holes.
- ★ This fitting should be fitted to a lighting supply with protected 5 Amp fuse or equivalent circuit breaker.
- ★ Always be sure to use the correct type and wattage of bulbs as indicated on the fitting. Never exceed the wattage stated.
- ★ When changing the bulb, always switch off at the mains and allow the old bulb to cool down before handling. Dispose of used bulbs carefully.

### **Before starting**

Please read through these instructions before commencing work, and keep them for future reference.

### **Fixing instructions**

#### **Step 1**

Make sure you have the following items which are required to install this light fitting:

- Two screwdrivers one suitable for a slotted screw and one suitable for a cross-headed screw
- Small electrical screwdriver
- Insulating tape
- Small pliers with cutter or insulation stripper

#### **Step 2**

**Warning: Before commencing installation, isolate the mains supply.**

#### **Step 3**

Remove the existing light fitting.

#### **Step 4**

Make sure that there is a joist or other solid mount at the point of fixing.  
This is necessary to take the weight of the light fitting.

#### **Step 5**

(see Fig 1.)

Insert each lampholder assembled arm into its socket on the center stem, adjust it to desired position and then tighten grub screws on socket using the Allen key provided. Ensure all arms are secured in place and that there is enough space to attach the glass shades.

#### **Step 6**

Remove side screws and lock washers from the fixing bracket and retain for later use.

#### **Step 7**

**FITTING MUST BE SECURED TO A JOIST OR JOIST BRIDGE.**

Taking care not to damage any house wiring, screw fixing bracket to the ceiling using the screws supplied in the accessory pack. The screws should penetrate the joist by at least 2cm. Support the weight of the fitting.

#### **Step 8**

Connect the wires in the following way:

##### **Light fitting flex**

Blue or wire marked "N".....Connect to....Black or Blue (Neutral)


Green/Yellow or wire marked "⊕" ....Connect to....Green/Yellow-sleeved Copper (Earth) ⊕

Brown or wire marked "L"..... Connect to....Switched live

##### **IMPORTANT!**

**The fittings earth wires must be connected to the household earth.**

**Diagrams are representative and may not fully match your product.**

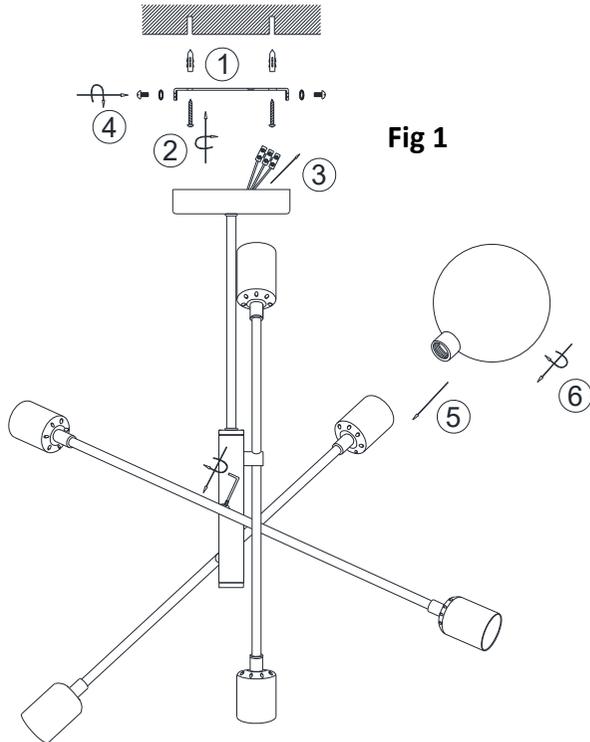

### **Step 9**

Check that .....


- ◆ you have correctly identified the house wires for the light fitting.
- ◆ connections are tight.
- ◆ no loose strands have been left out of the connection block(s).

### **Step 10**

Attach the ceiling plate to the fixing bracket using the side screws with lock washers.

#### **Selecting the correct light bulb**

- ◆ Wattage – 6 x 6W LED OR MAX 28W HALOGEN.
- ◆ Voltage – 240 Volts.
- ◆ Light bulb type –G9.




Do not exceed the maximum wattage as this may cause your light fitting to overheat. Use a soft cloth to handle bulbs. Insert bulb into each lampholder.

#### **Attaching shades**

Screw shades to each lamp holder gently. Ensure threads are properly aligned before tightening.

**ENSURE SHADE CANNOT TOUCH THE CEILING OR WALL.**

Ensure lamp holder arms are secure.

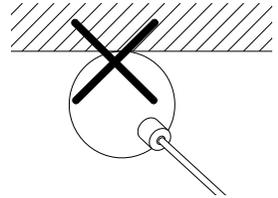

#### **Switch on!**

You may now switch the electricity back on. We are sure you will be pleased with your new light fitting.

#### **Cleaning care**

We recommend cleaning with a soft dry cloth. Do not use abrasive materials as these will rub away the decorative finish.

#### **Safety information**


For your safety, please remember the following:

Always switch off the supply before changing light bulbs or cleaning.

Allow bulbs to cool down before handling.

This product is designed for use with self-shielded tungsten halogen lamps. 

Or LED lamps.

This product should be positioned so that the bulbs are no closer than 10cm from the surface they are lighting. 

MATALAN  
— home —  
lighting



**Nova Smoked Glass Semi Flush**  
**Instructions**

Line Code: M490757